


JZTA1 Straight Needle Valve with Ferrule / Stainless Steel 316 / Compression Connectors / 6000 Psi / 1/4 3/8 1/2 inch Flow Control Instrumentation Straight Ferrule Compression Ends Needle Valve

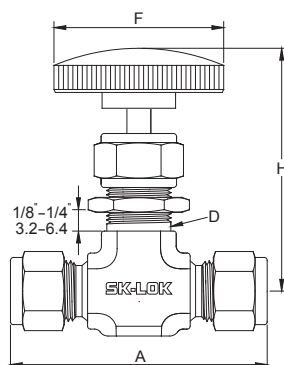

-JZTA1 Straight Needle valve with ferrule

Order information	End Connection		Orifice		Flow coefficient Cv	A		D		H		F	
	(in)	(mm)	(in)	(mm)		(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
-JZTA1-SK-2	1/8	3.17	0.080	2.0	0.09	1.94	49.3	0.47	11.9	2.28	57.9	1.00	25.4
-JZTA1-SK-4	1/4	6.35	0.172	4.4	0.37	2.27	57.7	0.53	13.5	2.50	63.5	1.38	35.1
-JZTA1-SK-6	3/8	9.52	0.250	6.4	0.73	2.58	65.5	0.78	19.8	2.97	75.4	1.88	47.8
-JZTA1-SK-8	1/2	12.70	0.375	9.5	1.80	3.80	96.5	1.03	26.2	3.90	99.1	3.00	76.2
-JZTA1-SK-12	3/4	19.05	0.375	9.5	1.80	3.80	96.5	1.03	26.2	3.90	99.1	3.00	76.2
-JZTA1-SK-3mm	0.118	3.00	0.080	2.0	0.09	1.94	49.3	0.48	12.2	2.28	57.9	1.00	25.4
-JZTA1-SK-6mm	0.236	6.00	0.172	4.4	0.37	2.27	57.7	0.53	13.5	2.50	63.5	1.38	35.1
-JZTA1-SK-8mm	0.315	8.00	0.172	4.4	0.37	2.34	59.4	0.53	13.5	2.50	63.5	1.38	35.1
-JZTA1-SK-10mm	0.374	10.00	0.250	6.4	0.73	2.60	66.0	0.78	19.8	2.97	75.4	1.88	47.8
-JZTA1-SK-12mm	0.472	12.00	0.375	9.5	1.80	3.80	96.5	1.03	26.2	3.90	99.1	3.00	76.2
-JZTA1-SK-14mm	0.551	14.00	0.375	9.5	1.80	3.80	96.5	1.03	26.2	3.90	99.1	3.00	76.2
-JZTA1-SK-18mm	0.709	18.00	0.375	9.5	1.80	3.80	96.5	1.03	26.2	3.90	99.1	3.00	76.2